
PJ-Adhesive Tape Film


Features:

*High transparency and gloss
*Good water steam barrier property
*High tensile strength
*Excellent ink and coating adhesion
*Excellent dimensional stability

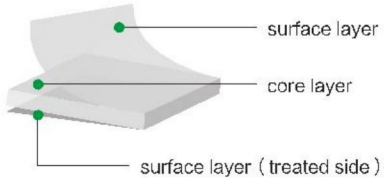

Typical thickness: 23、25、27、35mic, Special specifications can be customized according to customer requirements.

Usage: Used for base film of adhesive tape.

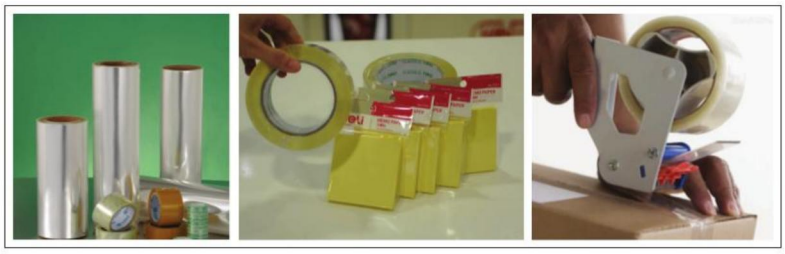

ITEM		TEST METHOD	UNIT	DATA
Tensile Strength	MD	ASTM D882	Mpa	≥140
	TD			≥280
Fracture Nominal Strain	MD	ASTM D882	%	≤170
	TD			≤60
Heat Shrinkage	MD	ISO 14616	%	≤4.0
	TD			≤2.5
Friction Coefficient	Treated Surface	ASTM D1894	-	≤0.55
	Non-treated Surface			≤0.40
Haze	12-23	ASTMD1003	%	≤1.2
	24-60			≤1.5
Gloss		ASTMD2457	%	≥90
Wetting Tension		ASTM2578	mN/m	40
Non Treated Side Corana				Not Allowed
Density		ISO845:2006	g/cm3	0.91

Our company basic product test data for your reference!

CHALVO
PACKAGING A WONDERFUL LIFE

Address : Longgang, Wenzhou, China
TEL:86-18858802198
E-mail : infol@chalvo.com
Web:Https:// www.chalvo.com